


GPU Fast Chargers



24V DC CHARGING SYSTEM



GPU 1700 and GPU 2400 portable aircraft start units are supplied with an internal 2.3A emergency charger designed to recharge the unit over an extended time period.

Frequent users of the GPU 1700 and GPU 2400 aircraft start units who require expedited charge times should consider the optional GPU fast charger.

The Powervamp GPU Fast Charger is designed to re-charge your GPU 1700 / GPU 2400 units quickly and safely whilst also optimising the batteries for maximum longevity.

GPU 1700 and GPU 2400 portable aircraft start units are supplied with an internal 2.3A emergency charger designed to recharge the unit over an extended time period.

Frequent users of the GPU 1700 and GPU 2400 aircraft start units who require expedited charge times should consider the optional GPU fast charger.

The Powervamp GPU Fast Charger is designed to re-charge your GPU 1700 / GPU 2400 units quickly and safely whilst also optimising the batteries for maximum longevity.

GPU Fast Charger connection

For GPU 1700 and GPU 2400:
24V Fast Charger with Merit connector



float charge quick charge



Charge mode display LEDs

GPU Fast Charger 24V DC

Specifications

Input	198-264V AC/ 47-63Hz/ single phase	
Output power	294W	
Charge timer (step 2)	4 hours ± 30 mins	
Safety timer	72 hours	
Maximum charge current	10A	
Ripple	< 100 mV p-p	
Efficiency (at 100%load)	> 83%	
Switch Frequency	67 kHz (approx.)	
Operating Temperature	-25°C to +40°C (77°F to 104°F) Storage -25°C to +85°C (77°F to 185°F)	
Protections	<ul style="list-style-type: none"> - Short circuit - Reversed polarity - Over-temperature - Safety timer 	
Safety	EN 60335-2-29	
Insulation class	Class I	
Insulation Voltage	Primary ground	1500V AC
	Primary secondary	4000V AC
	Secondary ground	500V AC
EMC	EN 61000-6-3 EN 61000-6-1 EN 550 14	
IP rating	IP20	
Dimensions (L x W x H)	H 58mm (2.8in), L 210mm (8.3in), W 148mm (75.8in)	
Weight	155kg (3.4lbs)	


Features

- 3-step charging with microprocessor control
- Low current start-up of deeply discharged batteries (step 0)
- Boost charge (step 1)
- Top-up charge (step 2)
- Pulsing float charge (step 3)
- Temperature compensation
- Protected against reversed polarity and short circuit proof
- Unaffected by fluctuations from input voltage
- 3-pin IEC-60320 input connector

CHARGE CONTROL - LED INDICATION

	Step 0 < 30 min (Yellow)	Step 0 > 30 min (Red=error)	Step 1 (Yellow)	Step 2 (Flash Yellow)	Step 3 (Green)	Float charge
24V	1.3A ± 0.5A (batt. volt < 21V)	< 0.3A	10A ± 0.5A 21-29.4V	29.4V ± 0.1V (until I charge < 1.3A or > 4hr)	27.4V ± 0.2V (until I charge > 10A)	27.4V ± 0.2V

Charging characteristics and LED indication

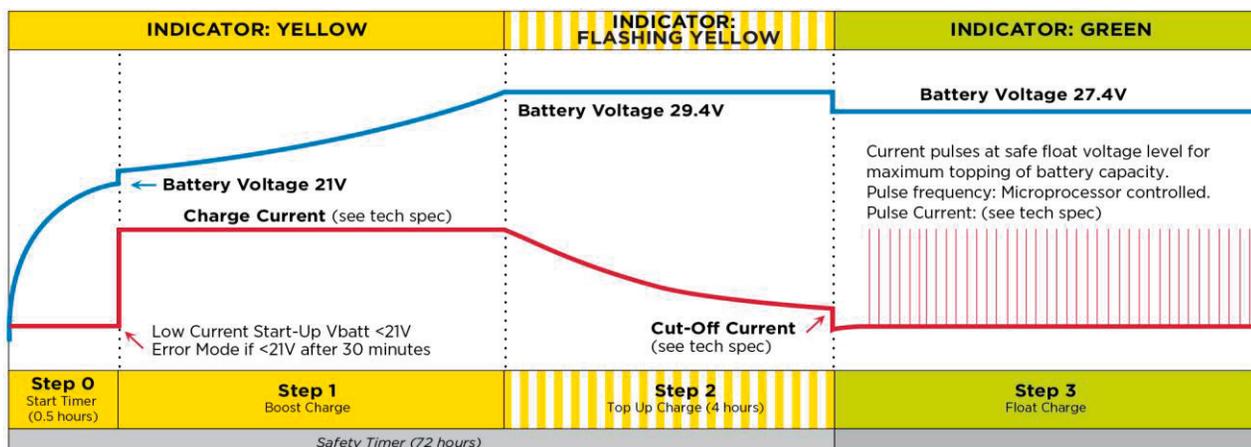

Germany
Telemeter Electronic GmbH
 Joseph-Gaensler-Str. 10, 86609 Donauwoerth
 Phone +49 906 70693-0, Fax +49 906 70693-50
 info@telemeter.de, www.telemeter.info

Switzerland
Telemeter Electronic GmbH
 Romanshonerstrasse 117, 8280 Kreuzlingen
 Phone +41 71 6992020, Fax +41 71 6992024
 info@telemeter.ch, www.telemeter.info

Czech Republic
Telemeter Electronic s.r.o.
 České Vrbné 2364, 370 11 České Budějovice
 Phone +420 38 530637
 info@telemeter.cz, www.telemeter.info